

INFORMATION SHEET – Greenwich site works

Riverlinx CJV are working on behalf of Transport for London to construct the Silvertown Tunnel.

What are we doing?

Works are now at a very advanced stage on the Greenwich site, with almost all civil works complete and road realignment works progressing at pace. Extensive fit out and highway works continue within the tunnel. Please see the below update for further details and upcoming works next quarter.

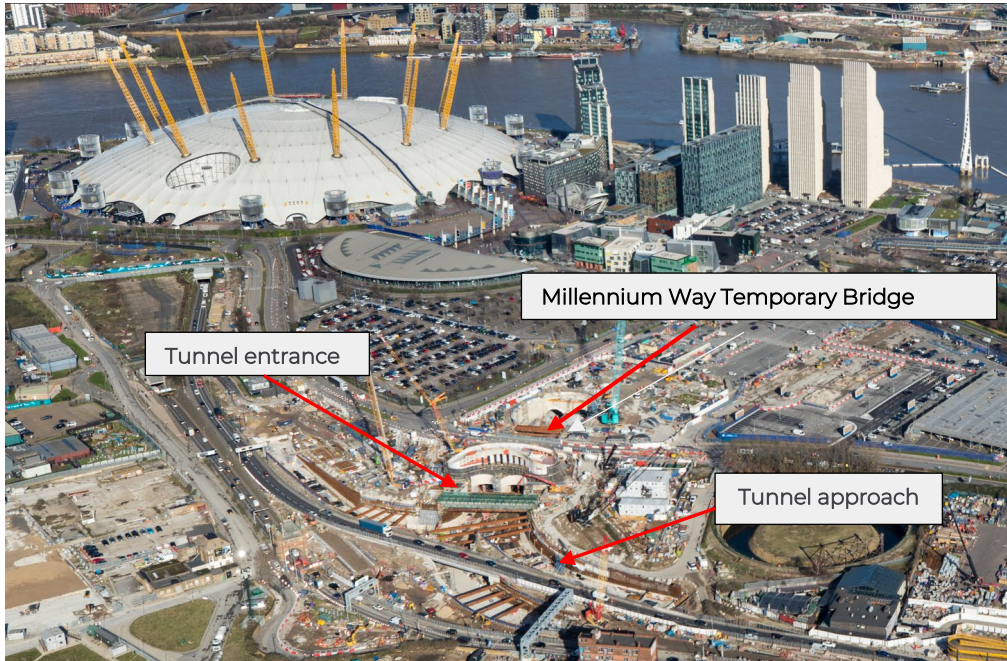


Fig. 1 The Silvertown Tunnel overview

Blackwall Tunnel (A102) weekend closures (Southbound)

To facilitate the resurfacing works on the northbound Blackwall Tunnel approach, the southbound carriageway will be closed during the following weekends:

From 00:01 Saturday 23 March to Monday 25 March 05:00

From 00:01 Saturday 06 April to Monday 08 April 05:00 (a contingency weekend if the previous weekend is not possible)

From 00:01 Saturday 13 April to Monday 15 April 05:00

For the latest updates on the Blackwall Tunnel, please visit: www.tfl.gov.uk/blackwall-tunnel.

For all future Riverlinx Traffic Management updates, you can also visit: www.riverlinx.co.uk/traffic-management.

Millennium Way reinstatement works

At the end of April, works will begin to reinstate Millennium Way. This will be carried out in phases until August to mitigate impact on traffic flows. At the same time, we will reinstate the permanent utility services beneath the carriageway. The Millennium Way temporary bridge will be removed during these works.

Cut and Cover tunnels

Works to construct the 'dome' like tunnels in this section of site are almost complete with only the last eight metres of the transition from the 'cut & cover' into the main tunnel yet to be built, see fig. 2 overleaf. Waterproofing works are being carried out to line the domes with a PVC membrane to protect the structure and ensure it remains watertight. All temporary propping will be removed to allow the backfilling around and above the domes which is expected to be completed by June 2024.

Open Cut – tunnel approach

Reinforced concrete works will continue in this area. The mechanical and electrical team now have access to the electrical risers which will provide power to the tunnel from the South Portal building.

Fig. 2 Dome installation



Fit out works

Another milestone was reached in February with the completion of cable tray installation throughout the entire 1.1km stretch of tunnels and cross passages. See fig. 3 below. Cable pulling has now started within the tunnel, including the first tranche for lighting. Over the next quarter, approximately 75km of electrical cable will be fitted. Inside the South Portal building - the control room for the tunnel - internal fit out of walls, floors and services has started and windows are being installed. Over the next 3 months permanent power and high voltage equipment will be brought in to connect to the lower voltage switchgear.



Fig. 3 Cable tray installation

Highways

Works on the new alignment of Tunnel Avenue are ongoing. Additionally, upgrade works including resurfacing of the road will begin this quarter on Boord Street up to Millennium Way junction with access being maintained to businesses. Cyclist and pedestrian routes will also remain open during the works, including use of the pedestrian and cycle bridge.

Working Hours

- Core hours: Mondays to Fridays: 08:00 to 18:00; Saturdays: 08:00 to 13:00.
- Extended hours: Mondays to Fridays: 18:00 to 22:00; Saturdays: 13:00 to 22:00 Sundays: 08:00 to 18:00
- Night Shift hours: Mondays to Sundays: 22:00 to 08:00

*Will only be utilised when required.

What to expect?

- Construction workers and vehicles moving in and around the site
- Some noise and vibration may be experienced during working hours
- Traffic Management will be in place to indicate any lane closures
- Due to on-going works on the A102, please plan your journeys and check before you travel

The next **Community Liaison Meeting** will be held on Tues 04 June at 18.00 in our Greenwich offices and on MS Teams. Please get in touch if you wish to attend **via the contact channels below:**

Please get in touch:
 Email: help@riverlinxcjv.co.uk
 24/7 Helpdesk: 079 079 784 86
 Website: www.riverlinx.co.uk/news



Follow us on:



www.linkedin.com/company/riverlinx



www.twitter.com/RiverlinxCJV